


3) Press MENU key again , screen show "OPTION" parameter

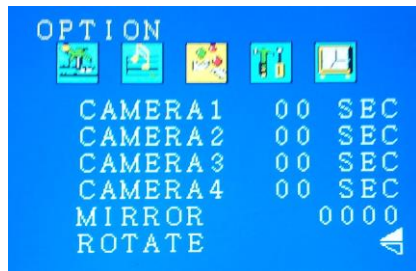

"CAMERA1 00 SEC" means the trigger wire operation delay time setting , such as "CAMERA1 03 SEC" means the monitor will keep showing AV1 for 3 seconds after trigger 1 wire trigger operation over.

MIRROR 0000 means all 4 channel are normal image , For example "1100" means the AV1/2 are mirror image , AV3/4 are normal image . Number 1 means "mirror" , number 0 means "normal"

4) Press MENU key again , screen show "SYSTEM parameter



5) Pressing MENU key again , screen show "PRESET" parameter



"LOOP TIME 01 SEC" means the AV1-2-3-4 loop interval time is 1s .

Trigger wire function:

This model is specially designed for 4 camera system.

If monitor is on stand by mode (power indicate light is on red) ,the monitor will turn on automatically and show picture when any trigger wire is triggered by DC9-36V voltage; and monitor will turn off after trigger operation is over.

If monitor is on power on mode (power indicate light is on blue) ,the monitor will show picture of the channel of corresponding to the trigger wire which is triggered by DC9-36V voltage; and monitor switch to the previous channel after trigger operation is over.

7" STAND ALONE MONITOR

Model CA730DQ

INSTRUCTION MANUAL

(16:9 ,Digital LCD panel)




4 camera input quad

MAIN CHARACTERICS

Display screen:	7" (16:9) digital panel
Color system:	PAL/NTSC auto switch
Resolution:	800 x 480
Brightness:	450cd/m ²
Contrast:	500:1
Viewing angle:	left:70 degree ,right:70 degree , up:40 degree , down:60 degree
Working /Storage temperature :	-30~+85 °C
Input voltage:	DC12V
Power consumption:	7W
Dimensions:	179(L) x123(W) x29(H) (mm)
Weight:	400g

PRODUCT DESCRIPTION

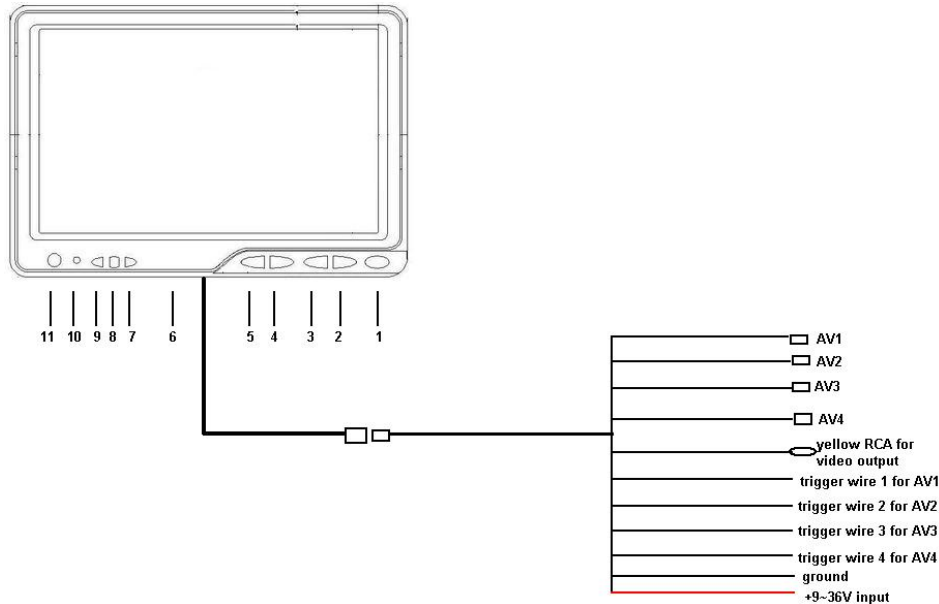

- 1. Power key:** When monitor connect with power supplier , the indicate light become red ; When press the power button to turn on the monitor , the indicate light become blue.
- 2.Channel key :** To switch between AV1/AV2/AV3/AV4 and VGA
- 3.MENU key:** To switch parameter , press the MENU key by turn ,

screen will show PICTURE / Volume / OPTION / SYSTEM / PRESET

4. +key :To increase parameter

5.-key :To down parameter

6. Mini USB female connector : To connect with quad box (on the bottom of case ,this connector only work for 730D model)

7.Quad splitter screen show key : Press this key ,the monitor will show 4 camera image by quad. Press again , AV1~AV4 picture will be shown by turn in full screen ,keep loop if no other operation

8.Duplex splitter screen show key: Press this key by turn ,the monitor will show Camera1 & camera2/camera3 & camera4 on full screen by turn

9.Full screen show key : When monitor connect with quad box , press this key by turn ,the monitor will show

Camera1/camera2/camera3/camera4 on full screen by turn

10.Power indicate light

11.Remote control receiver

MENU Operation:

1\Press MENU key ,screen show “PICTURE” parameter



2\Press MENU key again, screen show “VOLUME” parameter

