

Prima


APBX 10 AS₂

Active Saled Sub Box
800 W




| TECHNICAL SPECIFICATIONS | | |
|--------------------------|--------------|--|
| Component | | Active Sub Box |
| Subwoofer size | mm (in.) | 250 (10) |
| Power Handling | W peak | 800 |
| | W continuous | 400 |
| Impedance | Ω | 0,16 |
| Sub box size | mm (in.) | 440 (17.32) x 158 (6.22) x 334 (13.15) |
| Weight of one component | kg (lb.) | 9,4 (29.72) |
| Magnet | | High density flux ferrite |
| Cone | | Water-repellent pressed paper |
| Subwoofer Voice coil Ø | mm (in.) | 60 (2.36) |

- 1 Integrated 400 W RMS @ 0.16 Ω D-Class amplifier featuring he-li technology (high efficiency / low impedance) without switching power supply, for a performance next to ideal.
- 2 Input stage DBT (Dynamic Bass Tracking) technology allows 100% use of the he-li (High Efficiency Low Impedance) amplifier power and to enjoy a tense and dynamic bass even at very high listening volumes.
- 3 Butterworth low-pass filter at 12dB/Oct. with variable cutting frequency (50-300 Hz), phase control (0 - 180°) and adjustable bass-boost 0÷6 db @ 45Hz.
- 4 Defeatable filter to use the sub dedicated output of a bit or AP bit processor.
- 5 High level audio input on multi-pin connector for maximum OEM integration and low level on RCA for aftermarket sources.
- 6 ART turn on function (Automatic Remote Turn-On) selectable among: Remote-in, Hi-level, Audio signal.
- 7 Box with ultra-low profile (6.22 in. / 158 mm) in air suspension, designed to take full advantage of the performance of the 10-inch APS 10 DL high-impedance driver.
- 8 The SSP (Sub Smart Plug) terminal block is provided with a Plug&Play connector to be able to disconnect the box easily and safely.
- 9 The 2S² (2 Sides / 2 Sounds) design provides the ability to select between Down-Firing positioning to increase the low frequency extension and Up-Firing install to obtain more punch and definition.
- 10 Down-firing levelling feet with Velcro inserts included for a secure grip with the carpet, ensuring extreme ease of removal.
- 11 Rounded corners allow easy placement in the trunk and act as a reinforcement to reduce enclosure resonances.
- 12 Exclusive design of the cone, dust-cap and basket geometry to achieve a wide linear excursion (9 mm in one direction), keeping the depth required for assembly to a minimum.
- 13 HRC AP remote control included.
- 14 Sturdy metal grille included, for a total protection of the subwoofer driver.

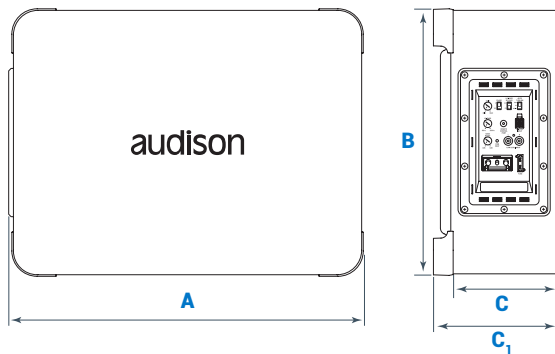

| A | B | C | C ₁ |
|-----------|-----------|----------|----------------|
| 440 mm | 334 mm | 135 mm | 158 mm |
| 17.32 in. | 13.15 in. | 5.31 in. | 6.22 in. |

From R&D to final product
KLIPPEL
since 2005

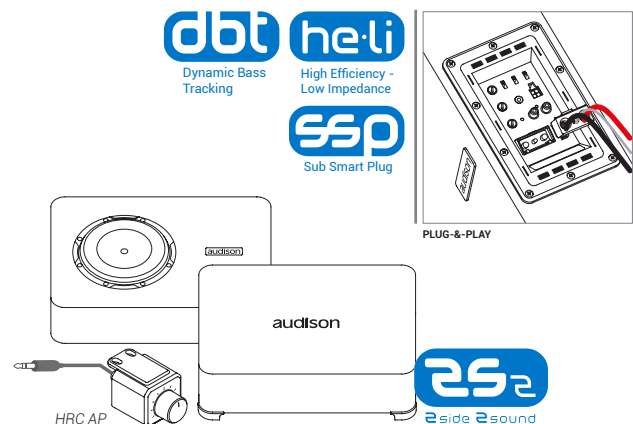

All specifications subject to change without notice_19.C

Technology Art Sound
Manufactured by
elettromedia

Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
elettromedia.com

